

BALL VALVE SERIES

球阀系列

设计标准: API 6D, ISO 17292, GB/T12237

尺寸: 1/2" 到 48" (DN15 到 DN1200)

压力: 150LB 到 2500LB 16公斤到420公斤)

材质: 碳钢, 不锈钢, 其他

操作: 手柄, 蜗轮, 电动, 气动

特殊: 逸散性要求、抗H₂S介质要求、海底球阀、低温球阀

Design Standard: API 6D, ISO 17292, GB/T12237

Size: 1/2" to 48" (DN15 to DN1200)

Class: 150LB to 2500LB (16 bar to 420 bar)

Material: Carbon Steel, Stainless Steel, others

Operation: Lever, Gear, Electric, Pneumatic

Special: Fugitive Emission Valve, Re-H₂S Environment Valve,
Subsea Ball Valve, Cryogenic Ball Valve.




浮动球阀
Floating Ball Valve

ZPV

BALL VALVE SERIES

球阀系列

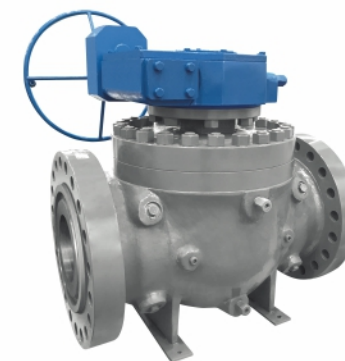

上装式球阀
Top Entry
Ball Valve



铸钢轨道球阀
Cast Steel Orbital
Ball Valve



铸钢法兰固定式球阀
Cast Steel Flange
Trunnion Ball Valve



全焊接固定式球阀
Fully Welded
Trunnion Ball Valve



DBB 双球一体式球阀
Flanged Integrated
DBB Trunnion Ball Valve



低温加长杆全焊接固定式球阀
Cryogenic Extended Stem Fully Welded
Trunnion Ball Valve



送审稿

Tel:400-633-5118