


METALLURGICAL VALVE SERIES

冶金阀系列

设计标准: GB/T12238、JB/T8692、API609、ASME B16.34、BS1873
 尺寸: DN300-DN2600
 压力: Class150~300LB (PN6-PN40)
 材质: WCB 碳钢、耐热铸钢, 耐高温密封件
 操作: 电动驱动, 带手轮手动应急
 特殊: 大口径刚性法兰, 流阻小、耐高温, 抗硫化氢腐蚀, 低逸散密封, 适配冶金热风、烟气、煤气通风自动化管路。

Design Standards: GB/T12238, JB/T8692, API609, ASME B16.34, BS1873
 Size Range: DN300 ~ DN2600
 Pressure Class: Class 150 ~ 300LB (PN6 ~ PN40)
 Body Material: WCB Carbon Steel, Heat-resistant Cast Steel,
 High-temperature Resistant Seals
 Operation Mode: Electric Actuation with Emergency Manual Handwheel
 Product Features:
 Rigid large-diameter flange design with low flow resistance.
 High temperature resistance and H2S corrosion resistance
 with low fugitive emission sealing.
 Ideal for automated ventilation pipelines of hot air,
 flue gas and coal gas in metallurgical industries.

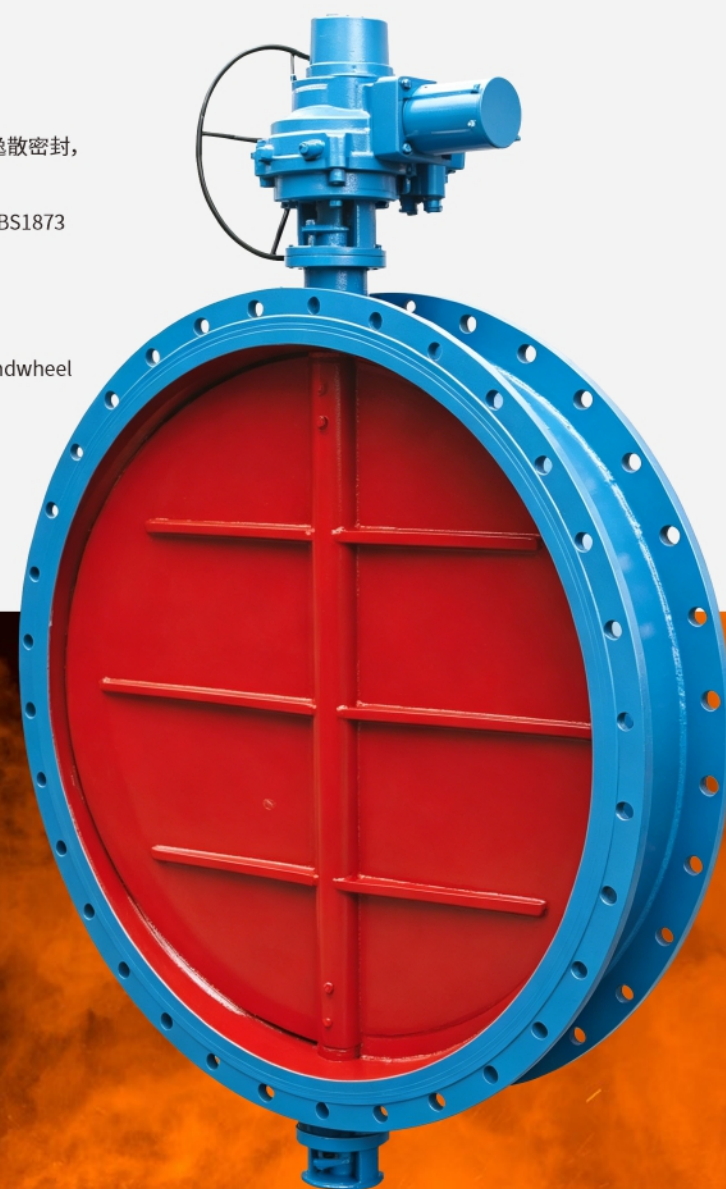

电动大口径通风蝶阀
 Electric Double Gate Gas
 Cut-off Valve

METALLURGICAL VALVE SERIES

冶金阀系列

电动封闭式插板阀(连杆式) Electric Closed-type Slide Gate Valve (Connecting Rod Type)	电动液压扇形盲板阀 Electro-hydraulic Sector Blind Plate Valve	蜗轮手动液压扇形盲板阀 Worm Gear Manual & Hydraulic Sector Spectacle Blind Valve
手动推杆式扇形盲板阀 Manual Push Rod Type Sector Spectacle Blind Valve	单、双层卸灰阀 Single & Double Layer Ash Discharge Valve	侧三通分料阀 Side Three-way Material Diverter Valve
双层棒条阀 Double Layer Bar Grate Valve	方形螺旋闸门 Square Screw Gate Valve	圆形螺旋闸门 Round Screw Gate Valve